



DSF-42BSS00


INSTALLATION INSTRUCTIONS



Notes before installation:

1. Please check that all components are present.
2. Before installation ensure that all feed lines are clear of debris and on/off valve is present.
3. Ensure water pressure is between 20-125 PSI (Includes combination of hot and cold feed lines).
4. Pictures in the manual are general in content and may not represent exactly your purchased faucet. If you are having difficulties please contact a professional plumber.
5. If you will be away from home for an extended period you should shut off the main water supply.


Tools you will need:



1. Adjustable Wrench





2. Pipe Tape




3. Phillips Screwdriver


65 - 80 mm
adjustment

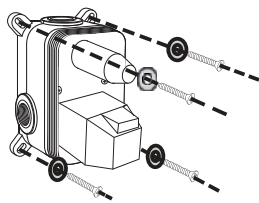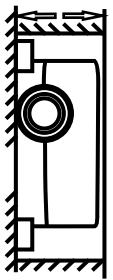


1. Valve body installation depth specs (if applicable)

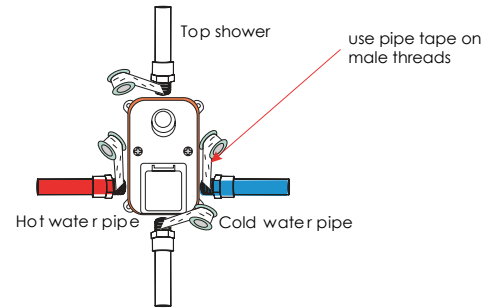


2. Attach supply lines to valve body. Attach lines out for shower and/or tub. Secure everything in place.

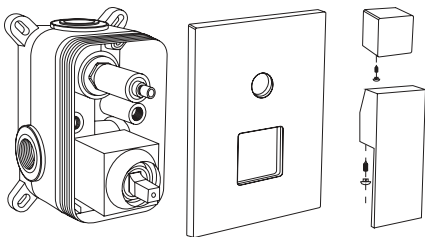


3. Install decorative cover plate and handle.

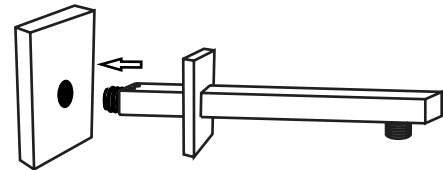

4. Install shower arm into adaptor in wall.

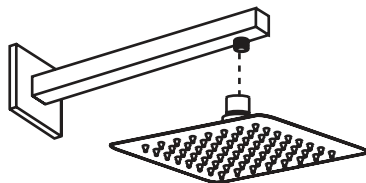

5. Install shower head to shower arm.

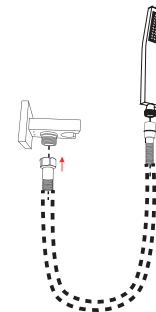

6. Install handheld shower